


### Key Features

- 1/3" progressive scan CMOS image sensor
- Up to 2 Megapixel resolution (1600 x 1200)
- 6 simultaneous users
- H.264/MPEG4/MJPEG streaming
- HD 720P Real time video
- Day/night auto switch
- 3-axis adjustment
- PoE
- Vandal proof
- Compatible with Videoswitch Net Recorders

### Dimensions

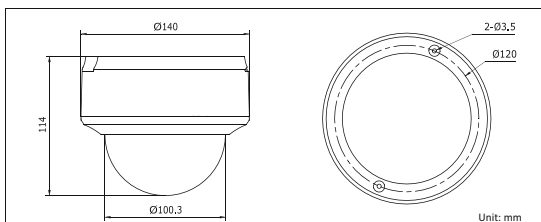

### Order Codes

**Vi-C5107**

2Mpixel IP Dome Camera

### Specification

#### Camera

Image sensor 1/3" progressive scan CMOS  
 Minimum Illumination 0.5 lux@F1.2, AGC on, 0.1 lux@F1.2, AGC on, sens-up × 5

Shutter 1/25s to 1/100,000s  
 Lens 2.7 ~ 9 mm @F1.2  
 Angle of view: 101° ~ 30.4°

Lens mount Ø14  
 Angle Adjustment Pan: 0° ~ 360°, tilt: 0° ~ 75°, rotation: 0°~ 360°  
 Day & Night Electronic

#### Compression

Video compression H.264 / MPEG4 / MJPEG  
 Bit rate 32 Kbps ~ 16 Mbps  
 Audio compression G.711  
 Dual stream Yes (different video compression)  
 Simultaneous users 6

#### Image

Max image resolution 1600 × 1200  
 Frame rate 12.5 fps (1600 × 1200)  
 12.5 fps (1600 × 912)  
 25 fps (1280 × 960)  
 25 fps (1280 × 720)

Image settings Saturation, brightness, contrast adjustable through client software or web browser

#### Network

Network storage NAS  
 Alarm trigger Motion detection, network disconnect, IP address conflict, storage exception  
 Protocols TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, SIP, FTP, SRTP, 802.1x, IPv6 optional)  
 Security Password protection, watermark  
 Compatibility ONVIF, PSIA, CGI

#### Interface

Audio input 1-ch microphone input, 3.5 mm mini-jack  
 Audio output 1-ch 3.5 mm audio interface (line level, 600 Ω)  
 Communications interface 1 RJ45 10M / 100M ethernet port  
 Alarm input 2  
 Alarm output 2  
 Video output 1 Vp-p composite PAL output (75 Ω / RCA)  
 Local storage Built-in SD/SDHC slot, up to 32 GB  
 Reset button Yes

#### Physical & Environmental

Operating temperature -10°C ~ 60°C  
 Humidity 90% or less (non-condensing)  
 Power supply 12 VDC ± 10%, PoE (802.3af)  
 Power consumption 4.5W max  
 Impact protection IEC60068-275Eh, 50J; EN50102, up to IK10  
 IR Range 10 - 20m  
 Dimensions Ø140mm x 114mm  
 Weight 1.4kg